



## Specification

Intelligent Feathering mode: three feathering printing functions make the printing effect more perfect and more delicate.

The new look, high-end atmosphere, more user-friendly desing, simple operation, bring you perfection.

9m<sup>2</sup>/h  
12m<sup>2</sup>/h  
18m<sup>2</sup>/h  
22m<sup>2</sup>/h

9m<sup>2</sup>/h  
13m<sup>2</sup>/h  
18m<sup>2</sup>/h  
25m<sup>2</sup>/h

9m<sup>2</sup>/h  
12m<sup>2</sup>/h  
18m<sup>2</sup>/h  
22m<sup>2</sup>/h

### One Head

High resolution: 6pass  
Quality: 4pass  
Standart: 3pass  
Draft: 2pass

### One Head

High resolution: 6pass  
Quality: 4pass  
Standard: 3pass  
Draft: 2pass

### One Head

High resolution: 6pass  
Quality: 4pass  
Standart: 3pass  
Draft: 2pass

### DX5



### XP600



### EP4720



### DX7



### Double Head

High resolution: 6pass  
Quality: 4pass  
Standart: 3pass  
Draft: 2pass

18m<sup>2</sup>/h  
24m<sup>2</sup>/h  
32m<sup>2</sup>/h  
40m<sup>2</sup>/h

### One Head

High resolution: 6pass  
Quality: 4pass  
Standart: 3pass  
Draft: 2pass

18m<sup>2</sup>/h  
24m<sup>2</sup>/h  
32m<sup>2</sup>/h  
40m<sup>2</sup>/h

## Technical Parameter

### Product Specifications

Model
Print head
Print width
Resolution
Ink
Carriage
Voltage
Package


### Parameter

S2000
DX5/XP600/EP4720/DX7 Head
1850mm
720*1440dpi
(C/M/Y/K)
Auto up&down carriage
AV220V/110V 50HZ/60HZ
2960*730*620mm





# Hot Foil Stamping Machine



ADL-3050A+



ADL-3050C



ADL-330C

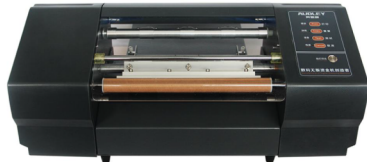

**SIMPLE STABLE EASY TO USE**

# Hot Foil Stamping Machine

Sample



3050

330



FOIL SPECIFICATION			
Model	Length	Width	Color
3050	90m	64mm	gold/silver/red/blue/black
330	60m	200mm	gold/silver/red/blue/black
		250mm	gold/silver

## Technical Parameter and Configuration

Model	ADL-3050A+	ADL-3050C	ADL-330C
Printing interface	USB	network interface	USB
Printing length	250mm	297mm	252mm
Printing width	57mm	210mm	297mm/420mm/etc.
Printing thickness	<25mm	<90mm	<1mm(<350g)
Speed	26mm/s	26mm/s	300pages/h
Resolution	300dpi	300dpi	300dpi
Power	150W	300W	200w
Voltage	220V	220V	220V
Gross weight	36KG	45KG	32KG
Package size	710*630*530mm	950*730*470mm	760*410*530mm
Max feeding width	300*600mm	300*600mm	330mm